



## PolySto PV15F

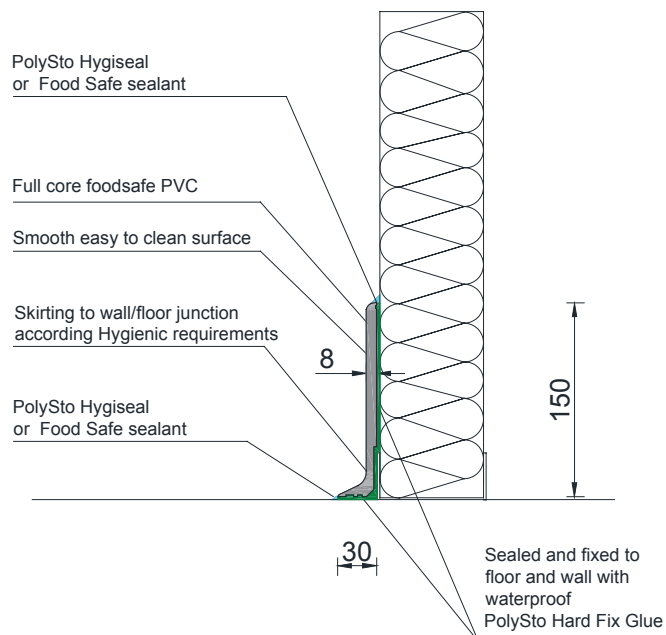

**Protection level 1**  
Protection against cleaning.

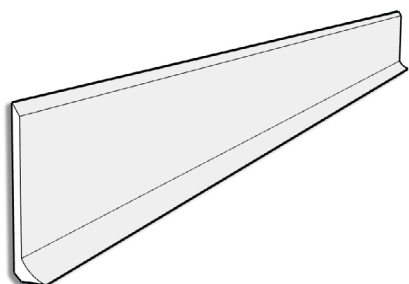

### Specification

**PolySto PV15F** is a prefabricated full core PVC skirting 2000x8x150mmH with sloped top and skirting to wall-floor according hygienic requirements. The PV15F skirting consists of a food grade PVC mass. Including matching accessories; prefabricated internal and external corners.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere). Finishing of the joints using PolySto Food Safe Sealant or a chemical welding HygiSeal.

Available in colour white and light grey.

### Consumption

*Consumption Food Safe sealant (per meter)*

Food Safe sealant white	150 cc
Food Safe sealant transparent	115 cc
Hard Fix Glue	220 cc
Installation m/day (8h) with 1 installer	40 meter


*Consumption HygiSeal (per meter)*

HygiSeal white	100 cc
Hard Fix Glue	220 cc
Installation m/day (8h) with 1 installer	30 meter


### Technical info

	Kerb	Corner internal / external
Length	2.000 mm	160/160 mm
Height	150 mm	150 mm
Thickness	8 mm	8 mm
Weight	4 kg	0,70 kg
Amount / pallet	500 m	300 pc
Pallet size	210x80x70cmH	120x80x70cmH
Pallet weight	+ - 1.050 kg	+ - 220 kg

Kerb

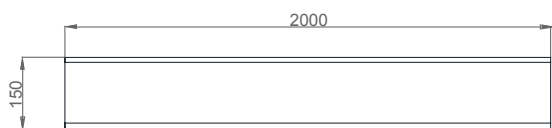

Internal corner



External corner

