

NUDO®

A VERZATEC COMPANY

SECURE-SHIELD™

MEDIUM SECURITY COMPOSITE
WALL AND CEILING PANEL



SECURITY

AT THE CORE OF DESIGN

POPULAR APPLICATIONS:

Corridor Walls
Data Rooms
Financial Institutions
Guard Houses

Hospitals
Interrogation Rooms
Jails & Prisons
Military Facilities

Municipal Buildings
Pharmaceutical Labs
Holding Cells
Schools

SECURITY WITHOUT SACRIFICING DESIGN



SECURE-SHIELD™

It's no secret the need for security has increased around the world. NUDO meets your requirements of a medium security wall and ceiling panel with our advanced composite panel – Secure-Shield™. The beauty of Secure-Shield is its ability to provide a high level of protection, without disrupting the design criteria necessary for your building and company image. Secure-Shield provides superior resistance to penetration from either blunt force or sharp instruments. It installs directly to the structural framing like any standard gypsum panel - no additional products or labor required.

Features and Benefits

- Polycarbonate panel backer provides superior resistance to penetration and impact.
- Panel can be customized to meet medium and high security requirements without sacrificing design or room aesthetics.
- Thickness options of the polycarbonate and gypsum provide impact resistance up to 3200 ft. pounds of energy.
- Composite one piece panel installs in a fraction of the time required for two step steel mesh products.
- Economical compared to other alternatives, such as concrete block and/or steel products.
- Surface finishes and protection can include a full range of patterns and colors, including High Pressure Laminates, Impact Resistant Plastics and Decorative Metals with a variety of textures and fire-resistance.



THE PANEL OF CHOICE IN CORRECTIONAL FACILITIES FOR OVER 10 YEARS

PHYSICAL CHARACTERISTICS & PROPERTIES

Standard Sizes

48" x 96"
48" x 120"
48" x 144"

Fire-Rating: Class A

Nominal Thickness

Gypsum Options: .50" or .625"
Polycarbonate Options: .010" up to .125"
FRP Options: .030" up to .090" *(Multiple Colors and Textures Available)*

Performance Properties

Impact Resistance - Based on gypsum and products used.
Contact NUDO for details.

Hardness - 65 lbs

NUDO®

A VERZATEC COMPANY

YOUR VISION IS OUR MISSION™

Fire-Rated Drywall

Polycarbonate Backer

Secure-Shield FRP (optional)
Fiberglass Reinforced
Plastic - Facing




Secure-Shield has been used as a secure wall and ceiling panel by the Pentagon and New York State Correctional Facilities for years. In addition to medium security areas of prisoner confinement, Secure-Shield meets the requirements for holding cells, interrogation rooms, sensitive data storage facilities, pharmaceutical labs, municipal buildings and more. Optional FRP faced panels provide moisture resistance and cleanability for use in kitchens, bathrooms, showers, locker rooms and clean rooms.

Installation of Secure-Shield panels meets all applicable codes and is consistent with standard construction methods outlined in the Gypsum Association GA-216.

MECHANICAL PROPERTIES*	Test Method	Units	Values
Tensile Strength, Ultimate	ASTM D 638	psi	9,500
Tensile Strength, Yield	ASTM D 638	psi	9,000
Tensile Modulus	ASTM D 638	psi	340,000
Elongation	ASTM D 638	%	110
Flexural Strength	ASTM D 790	psi	13,500
Flexural Modulus	ASTM D 790	psi	345,000
Compressive Strength	ASTM D 695	psi	12,500
Compressive Modulus	ASTM D 695	psi	345,000
Izod Impact Strength, Notched @ 0.125"	ASTM D 256	ft-lbs/in	18
Izod Impact Strength, Unnotched @ 0.125"	ASTM D 256	ft-lbs/in	60 (no failure)
Instrumented Impact @ 0.125"	ASTM D 3763	ft-lbs	>47
Shear Strength, Ultimate	ASTM D 732	psi	10,000
Shear Strength, Yield	ASTM D 732	psi	6,000
Shear Modulus	ASTM D 732	psi	114,000
Rockwell Hardness	ASTM D 785	—	M70 / R118

*Typical Values for Polycarbonate

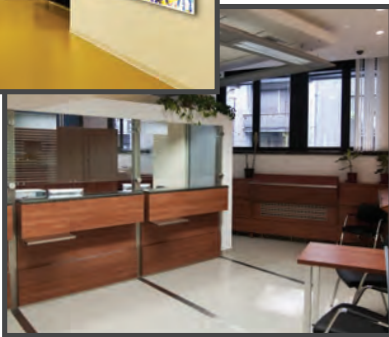

**Visit www.Nudo.com or
contact our local dealer for details.**



1500 Taylor Avenue
Springfield, IL 62703
www.Nudo.com

Ph: 800.826.4132
Fax: 217.528.8722