

YOU HAVE NEEDS...
WE HAVE SOLUTIONS.



NUDO[®]

WALL AND CEILING PANELS

Durability • Versatility • Cleanability • Simplicity



Founded in 1954, Nudo operates in four business segments: Building Products, Signage, Transportation Products and OEM supplies. Our building products sector consists of ceiling, wall, floor and exterior architectural panels. Over the years, we have grown to become one of the largest laminators in the United States. Our experience and commitment to quality contribute to our leadership position in producing panels with a variety of substrates such as plywood, oriented strand board (OSB), gypsum, composites and finishes such as aluminum, fiberglass and high-density polyethylene.

With 60 years of experience, we can confidently say that we understand the demands and expectations of the building industry. Our goal is to make things easy for you and that means a simple ordering process, fast turn times, more color options and moldings that are specifically made to match our panels. We stand behind our products and stand firm on 100% customer satisfaction – period!

PROCESSING PLANT




COLD STORAGE




-
- **No minimum quantities**
 - **Ability to custom cut any size of panel**
 - **Broad array of products to meet the demands of the most stringent environments**
 - **Most panels in stock, which allows faster turn times and quicker delivery**
 - **Wide variety of color options**
 - **Moldings specifically made to match our panels**
-

We are happy to assist with any questions you may have. There's no project too big or small and no challenge we can't overcome. Custom panel solutions are our specialty.


Embossed



Beige (293) Silver (260)




White (50) Black (806)




Pineapple (322) Medium Gray (1207)




Dark Gray (720) Khaki (203)



Brown (277) Blue (525)



Pearl (750) Almond (698)



Ivory (611) Red (132)



Bordeaux (139)

Smooth



Pearl (750) Almond (698)



White (50) Black (806)


FiberLite® FRP

Strength • Durability • Sanitation • Easy Maintenance

FiberLite FRP are fiberglass reinforced plastic panels that are ideal for new or retrofit construction. They install directly to solid wall surfaces or can be used for drop-in ceilings. FiberLite FRP panels are specially engineered to provide durability, easy maintenance and sanitation with exceptional physical and mechanical properties.

FiberLite liner panels provide all you expect from a “Fiberglass Reinforced Panel”. These panels are made for interior, moisture resistant environments. They are adhered directly to gypsum or plywood walls with a variety of different trowel-on adhesives. FiberLite is typically purchased in a .090” thickness. A wide selection of sizes, colors, textures and fire ratings are readily available. Competitive pricing and no minimums make FiberLite the choice of distributors from coast to coast.

COMMERCIAL KITCHEN

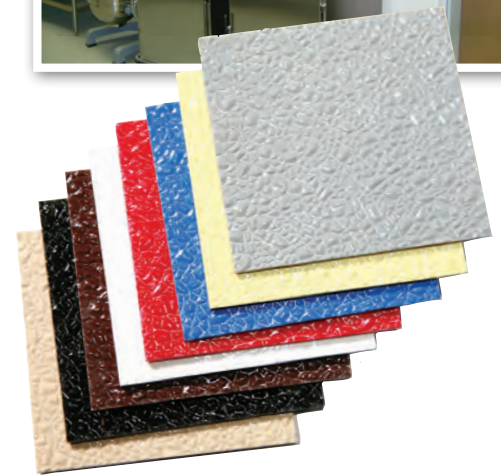

Features & Benefits

- Durable, shatter resistant surface that resists scratches
- 100% moisture resistant
- USDA and Agriculture Canada certified
- Thermal shock and chemical resistant
- Cleans easily with steam, high pressure sprayers or soap/water
- Extensive color options on textured or smooth surface improves design flexibility
- Class A or Class C fire rating available
- Color-matched moldings and fasteners available for easy installation
- High impact strength
- Low maintenance

Typical Applications

- Kitchens and Food Preparation Areas
- Bathrooms and Hallways
- Food Processing Plants
- Water and Wastewater Treatment Plants

Product Number	Thickness & Description	Sizes*
LP-F9	.090" Textured	4' x 8', 9', 10', 12'
LP-F9-R	.090" Textured-Roll	4' x 50', 250', 500'
LP-F9-WR	.090" Textured-Wide Roll	8' x 50', 250'
LP-F9-FR	.090" Textured Fire-Rated	4' x 8', 10'
LP-S9-FR	.090" Smooth Fire-Rated	4' x 8', 10'
LPXSG9-R	.090" High-Gloss Smooth	4' x 50', 500'
LP-F5	.050" Textured-.050	4' x 8', 10'
LP-F9-CT	.090" Textured-Ceiling Tile	2' x 2', 4'
LP-F100-CT	.100" Textured-Ceiling Tile	2' x 2', 4'
LP-F120	.120" Textured	4' x 8', 10'
LP-F120-CT	.120" Textured-Ceiling Tile	2' x 2', 4'

*Not all colors available in all sizes.

Durability • Sanitation • Seamless • Easy Installation

The need for a clean environment is met with UtiLite easy to maintain interlocking wall and ceiling panels. The interlocking nature of the panels offers a near seamless appearance. These versatile panels can be installed quickly, both vertically or horizontally, directly to studs or substrate. UtiLite's attractive price point and ease of installation provides cost effective solutions for contractors and installers.

Features & Benefits

- Clean, smooth white surface
- Innovative, corrugated plastic core provides a lightweight, durable panel
- 100% moisture resistant
- Interlocking edge provides a near seamless appearance while reducing installation time
- Class A fire rating
- Meets USDA, FDA and LA County requirements for walls and ceilings
- CIF-ULCS 102.2 – Class A

Typical Applications

- Food Processing Plants
- Automatic Car Washes
- Dairy Facilities
- Healthcare Facilities

Standard Sizes

16" x 8'	24" x 8'
16" x 10'	24" x 10'
16" x 12'	24" x 12'
16" x 16'	24" x 16'
16" x 20'	24" x 20'

LABORATORY



Also Available in Ceiling Tile

2' x 2' 2' x 4'

SecureShield™

Impact Resistant • Easy Installation • Security at the Core of Design

SecureShield is a composite panel that provides minimum to medium levels of wall security, without disrupting the design criteria necessary for your building. It provides superior resistance to penetration from either blunt force or sharp instruments. It installs directly to the structural framing like any standard gypsum panel – no additional products or labor required.

Features & Benefits

- Polycarbonate panel backer provides impact resistance up to 3200 ft. pounds of energy
- Can be customized to meet medium and high security requirements without sacrificing design
- Installs in a fraction of the time required for two step steel mesh products
- Surface finishes and protection can include a full range of patterns and colors
- Fiberglass reinforced plastic facing is available
- Class A fire rating

Typical Applications

- Correctional Facilities
- Interrogation Rooms
- Data Storage Rooms
- Pharmacies and Laboratories

Standard Sizes

4' x 8'
4' x 10'
4' x 12'

SECURE ROOM



FRP Finishes



Black (806)
Pebbled



Brown (277)
Pebbled



Sherwood Green
(233) Pebbled



Light Green (467)
Pebbled



Yellow (334)
Pebbled




Charcoal (710)
Pebbled




Pearl Gray (750)
Pebbled



White (50)
Smooth & Pebbled



Blue (525)
Pebbled



Bordeaux (139)
Pebbled



Red (132)
Pebbled



Orange (131)
Pebbled



Beige (293)
Pebbled



Khaki (203)
Pebbled




Almond (698)
Pebbled



Bronze (298)
Pebbled

Textures



Smooth



Pebbled

FiberCorr™

Lightweight • Moisture Resistant • Durability • Scratch Resistant

FiberCorr panels consist of a Fiberglass Reinforced Plastic (FRP) overlay that is factory laminated to a corrugated plastic core. This quality construction provides you with a lightweight panel that doesn't compromise durability. They feature easy installation to studs, ceiling joists, furring strips or solid surfaces. They can also be used as drop in ceiling tiles. The panels can be easily cut with standard hand and power saws.

Features & Benefits

- Textured or smooth panel with a scratch-resistant surface
- Available in white and a wide variety of colors, thicknesses, and sizes
- Resists moisture, stains, odors and chemicals
- USDA, FDA and Agriculture Canada approved
- Will not rot or deteriorate under high moisture conditions
- Not susceptible to termites or other insect damage
- Cleans easily
- Class A or C fire rated surfaces available

Typical Applications

- Water and Waste-Water Treatment Plants
- Marine Facilities
- Food Processing Plants
- Car Washes



CAR WASH



Product Number	Thickness & Description	Sizes	Wt.
F3C200	.030 FRP One Side .200" Corr./Fluted	4' x 8', 10'	20 lb.
F3C320	.030 FRP One Side .320" Corr./Fluted	4' x 8', 10'	18 lb.
F3C400	.030 FRP One Side .400" Corr./Fluted	4' x 8', 10'	20 lb.
F3C400-D-CT	.030 FRP Two Side .400" Corr./Fluted	2' x 2', 4'	7 lb.
V43S0	.400" (10 mm) Division Bar Wht.	8', 10'	
V41S0	.400" (10 mm) Cap Wht. Vinyl	8', 10'	
V-21	.400" (10 mm) ICS Wht. Vinyl	8', 10'	
V-23	.400" (10 mm) OCS Wht. Vinyl	8', 10'	
SSW	Super Silicone White	10 oz.	

Moisture Resistant • Enhanced Durability • Aesthetically Pleasing

BPLite is a High Density Polyethylene (HDPE) liner panel manufactured by Nudo from 100% virgin materials. BPLite panels are ideal for environments requiring moisture resistance without compromising room aesthetics. The panel provides a lower cost solution when compared to FRP. BPLite is readily available in cracked ice white and in a .090" thickness. Other colors, textures and sizes are available upon request. BPLite has a Class C fire rating.

Features & Benefits

- 100% moisture resistant
- Will not rot or deteriorate under high moisture conditions
- Fibrous mat backer improves mechanical bond
- Available in an antimicrobial treatment




Typical Applications

- Animal Confinement Buildings
- Food Preparation Areas
- Service Areas

Standard Sizes

4' x 8' 4' x 10'

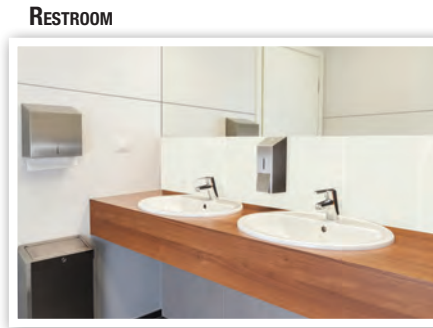

Durability • Sanitation • Easy Installation

NuPoly panels are a high density polyethylene (HDPE) overlay, factory laminated to various substrates on one or both sides. They install directly to studs, ceilings or floor joists, furring strips or solid walls/floors. NuPoly panels are an economical solution for areas requiring scratch and moisture resistance. Available in a variety of colors, textures and sizes.

Features & Benefits

- Scratch and impact resistant
- Chemical, moisture and fungus resistant
- Cleans easily with steam, high pressure sprayers or soap/water
- Available in smooth or textured and in various thicknesses and colors
- Excellent wearing capabilities for floors or decking in both interior and exterior environments
- Class C fire rating available
- Wide variety of substrates available
- USDA, FDA and Agriculture Canada approved



Product Number	Thickness & Description	Sizes
E3P375	3/8" Fir Exterior Plywood	4' x 8', 10', 12'
E3W375	3/8" Waferboard - OSB	4' x 8', 10', 12'
E3DF375	3/8" Fire-Rated Particle Board	4' x 8', 10'
E3P500	1/2" Fir Exterior Plywood	4' x 8', 10', 12'
E3W625	5/8" Waferboard - OSB	4' x 8', 10'

Typical Applications

- Barns and Animal Confinement Buildings
- Modular Buildings
- Metal and Rural Buildings

FRP Finishes



Black (806)
Pebbled



Brown (277)
Pebbled



Sherwood Green (233)
Pebbled



Light Green (467)
Pebbled



Yellow (334)
Pebbled




Charcoal (710)
Pebbled




Pearl Gray (750)
Pebbled




White (50)
Smooth & Pebbled



Blue (525)
Pebbled



Bordeaux (139)
Pebbled



Red (132)
Pebbled



Orange (131)
Pebbled



Beige (293)
Pebbled



Khaki (203)
Pebbled




Almond (698)
Pebbled



Bronze (298)
Pebbled

Textures



Smooth



Pebbled

NuFiber™

Strength • Durability • Sanitation • Easy Maintenance

The NuFiber panel is a durable, fiberglass sheet factory laminated to waferboard or plywood combining the many advantages of wood and fiberglass (FRP). NuFiber is ideal for new construction of walls, ceilings or partitions. They easily install directly to studs, ceiling joists, furring strips or solid surfaces, and some can even be utilized as a drop in ceiling tile.

WINERY



Features & Benefits

- USDA, FDA and Agriculture Canada certified
- Wood substrate for structural strength rigidity
- Resists moisture, stains, odors, chemicals, impact and scratches
- Cleans easily with steam, high pressure sprayers or soap/water
- Class A or Class C fire rating available
- Available in a wide variety of colors, sizes and other substrates

Typical Applications

- Barns and Animal Confinement Buildings
- Modular Buildings
- Metal and Rural Buildings

Product Number	Thickness & Description	Sizes
F3P250	1/4" Fir Exterior Plywood	4' x 8'
F3P375	3/8" Fir Exterior Plywood	4' x 8', 10', 12'
F3W375	3/8" Waferboard - OSB	4' x 8', 10'
F3DF375-FR	Fire-Rated Particle Board	4' x 8', 10'
F3P500	1/2" Fir Exterior Plywood	4' x 8', 10', 12'
F3PB500-FR-MR	.030" Text. FRP-1 Side on 1/2" Gypsum	4' x 8', 10', 12'
F3PB500-FR-MR-F200-X-CT	1/2" Gypsum, 2" Extruded Foam	2' x 2', 2' x 4'
F3W500	1/2" Waferboard - OSB	4' x 8'
F3DF500-FR	1/2" Fire Rated Particle Board	4' x 8', 10'
F3W625	5/8" Waferboard - OSB	4' x 8'
F3PB625-FR-MR	5/8" Fire-Rated Gypsum	4' x 8', 10'

ACCESSORIES

Nudo provides the accessory items needed to simplify the installation for any of our panel systems. All moldings are custom extruded to specifically match the panel being used.

- Vinyl and aluminum moldings offered in a variety of profiles
- Adhesives, sealants, rivets, screws and nails
- Mechanical fasteners
- Matching FRP colors, moldings and rivets



PRODUCT QUICK REFERENCE CHART

	FiberLite	UtiLite	SecureShield	FiberCorr	BPLite	NuPoly	NuFiber
Description	Fiberglass reinforced plastic (FRP) panels	Corrugated/fluted PVC substrate with a smooth finish and seamless interlocking edge connections	Security wall panel combining gypsum, polycarbonate and FRP	Corrugated/fluted polypropylene core with a FRP face	High-density polyethylene panels with a smooth or textured finish	High-density polyethylene laminated to plywood and OSB substrates	Fiberglass reinforced plastic (FRP) panels laminated to plywood, gypsum or OSB
Use	Functional wall covering, drop-in ceiling	Easily cleaned, water resistant functional wall panels	Secure designed performance walls or ceilings	Designed performance walls, drop-in ceilings	Functional wall covering, drop-in ceiling	Designed performance wall panels	Designed performance wall panels
Substrate	None	Corrugated plastic core	Gypsum & polycarbonate	Corrugated plastic core	None	Plywood & OSB	Plywood, gypsum, OSB
Available Fire-Rating	Class A & C	Class A	Class A	Class A & C	Class C	Class C	Class A & C
Certifications	USDA & Canada Agriculture	USDA, FDA & LA County	Not Applicable	USDA, FDA & Canada Agriculture	USDA, FDA & Canada Agriculture	USDA, FDA & Canada Agriculture	USDA, FDA & Canada Agriculture
Maintenance	Spray clean, mild solvents	Spray clean, mild solvents	Not Applicable	Spray clean, mild solvents	Spray clean, mild solvents	Spray clean, mild solvents	Spray clean, mild solvents

NUDO®

1500 Taylor Avenue
Springfield, IL 62703
www.Nudo.com

Ph: 800.826.4132
Fax: 217.528.8722

Visit www.Nudo.com or
contact our local dealer for details.