


Protection level 1

Protection against cleaning.

PolySto PV8F

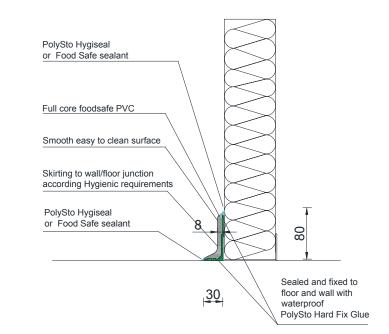

Specification

PolySto PV8F is a prefabricated full core PVC skirting 2000x8x80mmH with sloped top and skirting to wall-floor according hygienic requirements. The PV8F skirting consists of a food grade PVC mass. Including matching accessories; prefabricated internal and external corners.

Waterproof bonding using PolySto Hard Fix Glue (Hybrid Polymere). Finishing of the joints using PolySto Food Safe Sealant or a chemical welding HygiSeal.

Available in colour white and light grey.

Consumption

Consumption Food Safe sealant (per meter)


Food Safe sealant white	80 cc
Food Safe sealant transparent	60 cc
Hard Fix Glue	120 cc
Installation m/day (8h) with 1 installer	60 meter


Consumption HygiSeal (per meter)

HygiSeal white	100 cc
Hard Fix Glue	120 cc
Installation m/day (8h) with 1 installer	30 meter

Kerb







Technical info

	Kerb	Corner internal / external
Length	2.000 mm	160/160 mm
Height	80 mm	80 mm
Thickness	8 mm	8 mm
Weight	2 kg	0,36 kg
Amount / pallet	1.000 m	500 pc
Pallet size	210x80x70cmH	120x80x70cmH
Pallet weight	+- 1.050 kg	+- 200 kg
Temperature resistance	-35°C - +70°C (long exposure)	

Internal corner

External corner